




PRODUCT SPECIFICATION: KM-1027-3 240V/3PH

DIMENSIONS

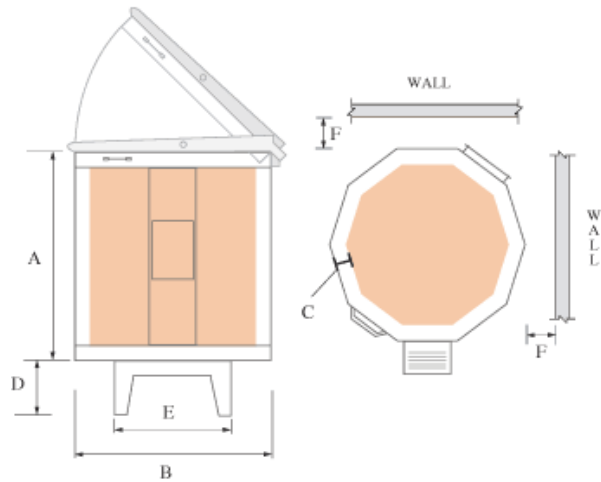

SPECIFICATIONS & DIMENSIONS

| MODEL | Phase | Volts | Maximum | | Chamber | | O.D. Dimension | | | | | | Power | | Copper Wire Size | NEMA Recp. Conf. | BTU's |
|-----------------------|-------|-------|---------|------|---------|---------------|----------------|---|---|---|---|---|-------|------|------------------|------------------|-------|
| | | | Cone | Temp | Depth | Opening Width | Cu.Ft. | A | B | C | D | E | F | Amps | | | |
| KM-1027-3 240V/3PH | | | | | | | | | | | | | | | | | |

OPTIONAL ACCESORIES

CONTROLLER

Thermocouple:
 Clock: 60 Mhz
 Voltage: DC Relays
 Output: Volts DC
 Fuse: AMP