




# PRODUCT SPECIFICATION: GM-1014/240V KILN W/STAND

DIMENSIONS

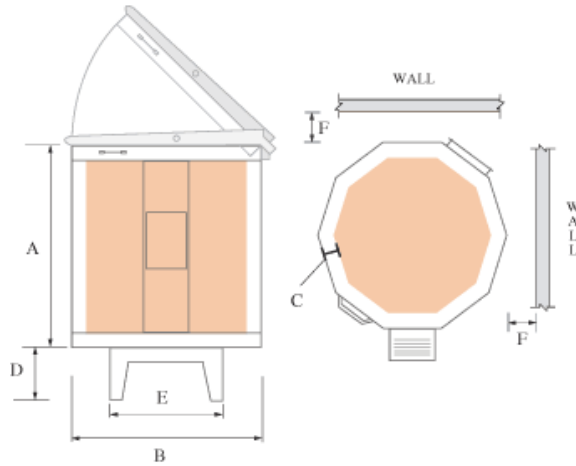

SPECIFICATIONS & DIMENSIONS

| MODEL                           | Phase | Volts | Maximum |      | Chamber |               | O.D. Dimension |   |   |   |   |   | Power |      | Copper Wire Size | NEMA Recp. Conf. | BTU's |
|---------------------------------|-------|-------|---------|------|---------|---------------|----------------|---|---|---|---|---|-------|------|------------------|------------------|-------|
|                                 |       |       | Cone    | Temp | Depth   | Opening Width | Cu.Ft.         | A | B | C | D | E | F     | Amps |                  |                  |       |
| GM-1014/240V<br>KILN<br>W/STAND |       |       |         |      |         |               |                |   |   |   |   |   |       |      |                  |                  |       |

OPTIONAL ACCESORIES

CONTROLLER

- Thermocouple:
- Clock: 60 Mhz
- Voltage: DC Relays
- Output: Volts DC
- Fuse: AMP