




# PRODUCT SPECIFICATION

## GM-1214/240V 3PH KILN W/LID LIFT

### DIMENSIONS

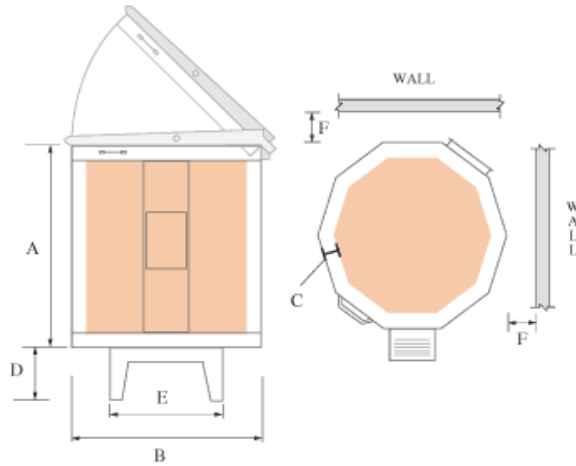

### SPECIFICATIONS & DIMENSIONS

| MODEL                                  | Phase | Volts | Maximum |      | Chamber |               | O.D. Dimension |   |   |   |   |   | Power |      | Copper Wire Size | NEMA Recp. Conf. | BTU's |       |
|--|-------|-------|---------|------|---------|---------------|----------------|---|---|---|---|---|-------|------|------------------|------------------|-------|-------|
|  |       |       | Cone    | Temp | Depth   | Opening Width | Cu.Ft.         | A | B | C | D | E | F     | Amps |                  |                  |       | Watts |
| GM-1214/240V<br>3PH KILN<br>W/LID LIFT |       |       |         |      |         |               |                |   |   |   |   |   |       |      |                  |                  |       |       |

### OPTIONAL ACCESORIES

### CONTROLLER

Thermocouple:  
 Clock: 60 Mhz  
 Voltage: DC Relays  
 Output: Volts DC  
 Fuse: AMP