




PRODUCT SPECIFICATION: KS-1027-3



DIMENSIONS

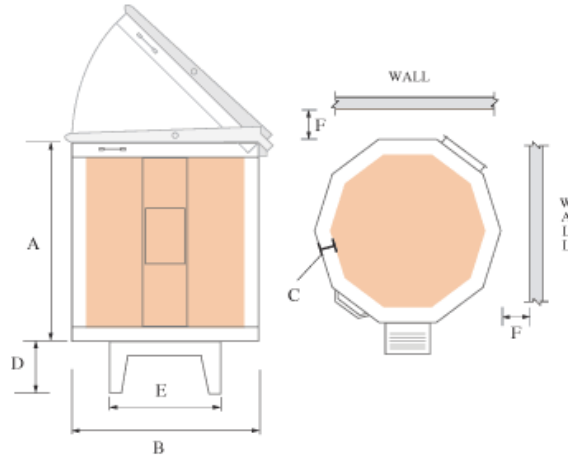

SPECIFICATIONS & DIMENSIONS

| MODEL | Phase | Volts | Maximum | | Chamber | | | O.D.Dimension | | | | | | Power | | Copper Wire Size | NEMA Recp. Conf. | BTU's |
|-----------|-------|-------|---------|------|---------|---------------|--------|---------------|------|---|---|----|----|-------|-------|------------------|------------------|-------|
| | | | Cone | Temp | Depth | Opening Width | Cu.Ft. | A | B | C | D | E | F | Amps | Watts | | | |
| KS-1027-3 | 3 | 240 | 10 | 2350 | 27 | 22.00 | 6.4 | 33 | 28.5 | 3 | 8 | 17 | 18 | 29.3 | 11520 | 8 | 15-50 | |

OPTIONAL ACCESORIES

| | |
|-------------------------|----------|
| 1027 ROLLING KILN STAND | Optional |
| ENVIROLINK | Optional |
| ENVIROVENT 2 | Optional |

CONTROLLER

Thermocouple:
 Clock: 60 Mhz
 Voltage: DC Relays
 Output: Volts DC
 Fuse: AMP

