




PRODUCT SPECIFICATION: FIREBOX 14

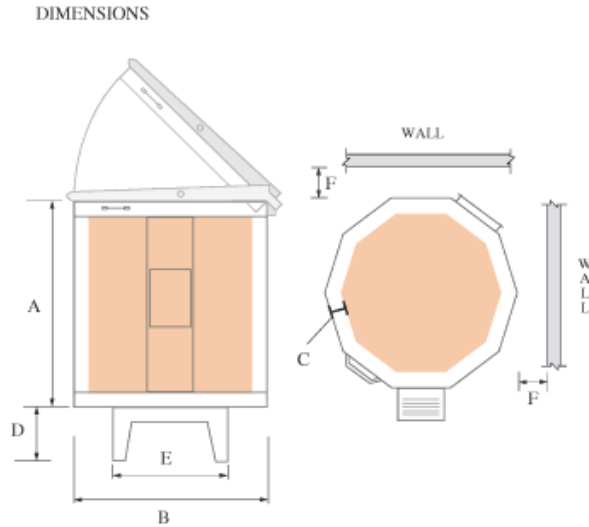

SPECIFICATIONS & DIMENSIONS

MODEL	Phase	Volts	Maximum		Chamber			O.D.Dimension						Power		NEMA Recp. Conf.	BTU's
			Cone	Temp	Depth	Opening Width	Cu.Ft.	A	B	C	D	E	F	Amps	Watts		
FIREBOX 14	1	115	0	1700	6.5	15.00	0.8	12.5	20.5	2.5	8	17.5	18	15	1725	5-15	4300

OPTIONAL ACCESORIES

FIREBOX 14/GLAZETECH ROLLING STAND Optional

CONTROLLER

Thermocouple: K
 Clock: 60 Mhz
 Voltage: 24 DC Relays
 Output: 12 Volts DC
 Fuse: 0.5 AMP

