




PRODUCT SPECIFICATION: HOTSTART PRO W/ACCESS KIT

DIMENSIONS

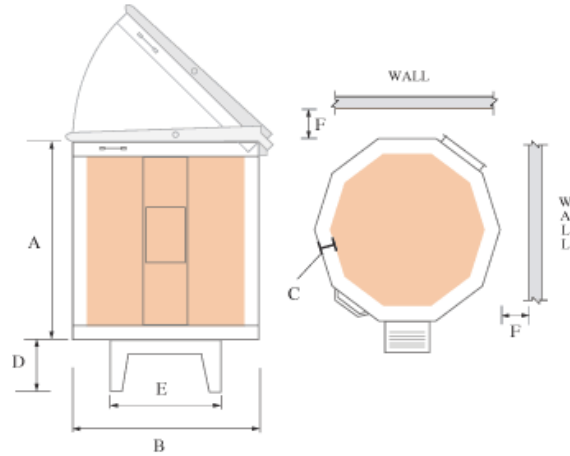

SPECIFICATIONS & DIMENSIONS

MODEL	Phase	Volts	Maximum		Chamber			O.D.Dimension						Power		Copper Wire Size	NEMA Recp. Conf.	BTU's
			Cone	Temp	Depth	Opening Width	Cu.Ft.	A	B	C	D	E	F	Amps	Watts			
HOTSTART PRO W/ACCESS KIT	1	115	0	1700	6.5	15.00	0.6	11	20	2.5	8	12	18	15	1725	12	5-15	4300

OPTIONAL ACCESSORIES

CONTROLLER

Thermocouple: K
 Clock: 60 Mhz
 Voltage: 24 DC Relays
 Output: 12 Volts DC
 Fuse: 0.5 AMP



Print this page