




# PRODUCT SPECIFICATION: GM-10F



DIMENSIONS

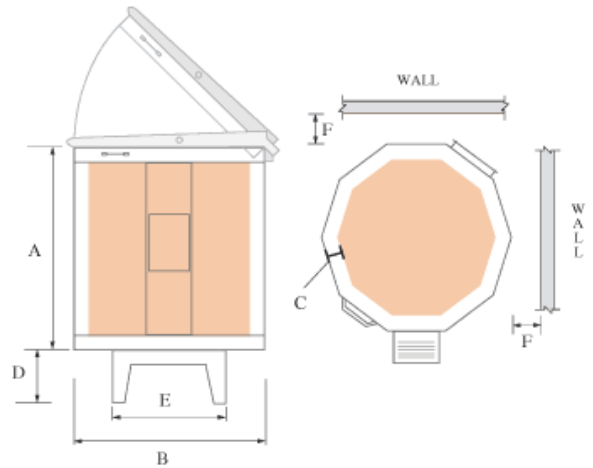

SPECIFICATIONS & DIMENSIONS

| MODEL  | Phase | Volts | Maximum |      | Chamber |               |        | O.D.Dimension |    |               |     |   |   | Power |       | Copper Wire Size | NEMA Recp. Conf. | BTU's |      |      |
|--------|-------|-------|---------|------|---------|---------------|--------|---------------|----|---------------|-----|---|---|-------|-------|------------------|------------------|-------|------|------|
|        |       |       | Cone    | Temp | Depth   | Opening Width | Cu.Ft. | A             | B  | C             | D   | E | F | Amps  | Watts |                  |                  |       |      |      |
| GM-10F | 1     | 115   |         | 1800 | 9       | 10.00         | 0.45   | 16            | 11 | 25<br>x<br>11 | 2.5 |   |   |       | 18    | 15               | 1725             | 12    | 5-15 | 3600 |

OPTIONAL ACCESORIES

CONTROLLER

- Thermocouple: K
- Clock: 60 Mhz
- Voltage: 24 DC Relays
- Output: 12 Volts DC
- Fuse: 0 AMP

