




# PRODUCT SPECIFICATION: GM-814



DIMENSIONS

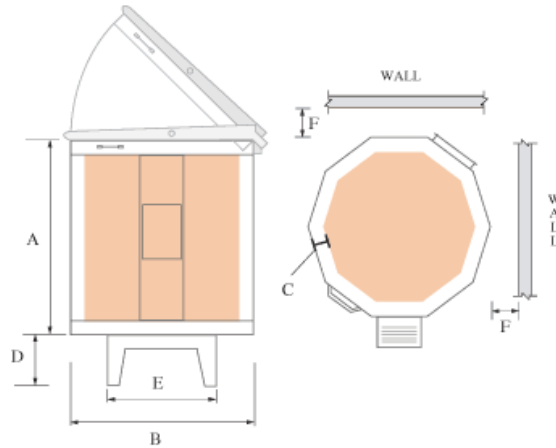

SPECIFICATIONS & DIMENSIONS

| MODEL  | Phase | Volts | Maximum |      | Chamber |               |        | O.D.Dimension |      |     |   |      |    | Power |       | Copper Wire Size | NEMA Recp. Conf. | BTU's |
|--------|-------|-------|---------|------|---------|---------------|--------|---------------|------|-----|---|------|----|-------|-------|------------------|------------------|-------|
|        |       |       | Cone    | Temp | Depth   | Opening Width | Cu.Ft. | A             | B    | C   | D | E    | F  | Amps  | Watts |                  |                  |       |
| GM-814 | 1     | 208   |         | 1800 | 13.5    | 18.00         | 2      | 18.5          | 22.5 | 2.5 | 8 | 15.5 | 18 | 32    | 6660  | 8                | 6-50             | 7600  |

OPTIONAL ACCESORIES

|                   |          |
|-------------------|----------|
| 814 ROLLING STAND | Optional |
| ADJUSTABLE        | Optional |
| ENVIROVENT 2      | Optional |

CONTROLLER

Thermocouple: K  
 Clock: 60 Mhz  
 Voltage: 24 DC Relays  
 Output: 12 Volts DC  
 Fuse: 1 AMP

