




SKUTT
GLASS KILNS

PRODUCT SPECIFICATION: GM-1227-3

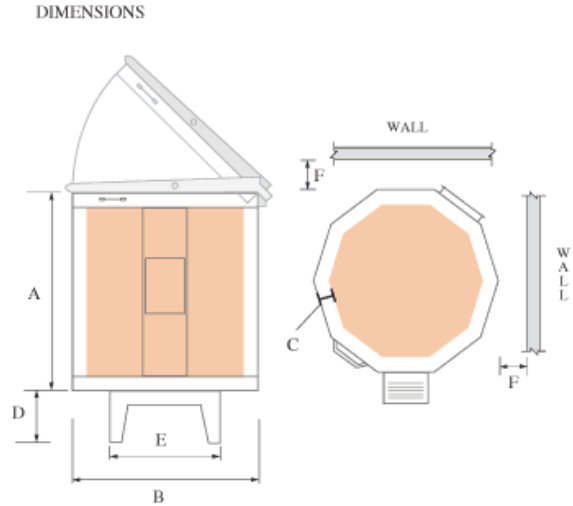

SPECIFICATIONS & DIMENSIONS

| MODEL | Phase | Volts | Maximum | | Chamber | | | O.D.Dimension | | | | | | Power | | Copper Wire Size | NEMA Recp. Conf. | BTU's |
|-----------|-------|-------|---------|------|---------|---------------|--------|---------------|----|---|---|------|----|-------|-------|------------------|------------------|-------|
| | | | Cone | Temp | Depth | Opening Width | Cu.Ft. | A | B | C | D | E | F | Amps | Watts | | | |
| GM-1227-3 | 1 | 208 | | 1800 | 27 | 28.00 | 9.9 | 33 | 33 | 3 | 8 | 23.5 | 18 | 48 | 9984 | 6 | 6-50 | 16700 |

OPTIONAL ACCESSORIES

| | |
|--------------|----------|
| ENVIROVENT 2 | Optional |
|--------------|----------|

CONTROLLER

Thermocouple: K
 Clock: 60 Mhz
 Voltage: 24 DC Relays
 Output: 12 Volts DC
 Fuse: 0 AMP



Print this page