




# PRODUCT SPECIFICATION. GM-1227-3

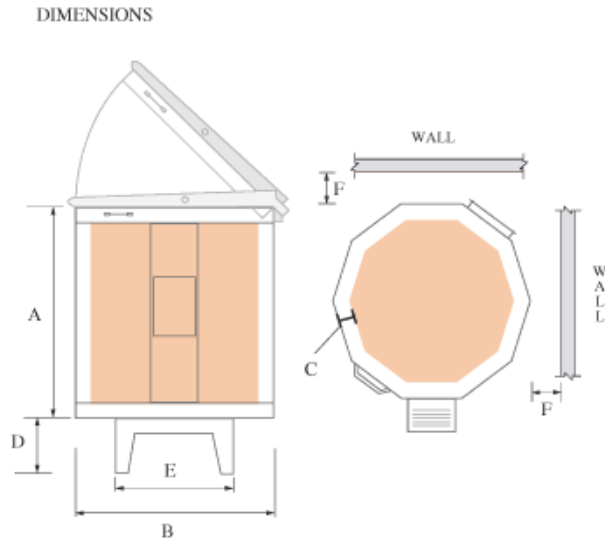

## SPECIFICATIONS & DIMENSIONS

MODEL	Phase	Volts	Maximum		Chamber				O.D.Dimension						Power		NEMA Recp. Conf.	BTU's
			Cone	Temp	Depth	Opening Width	Cu.Ft.	A	B	C	D	E	F	Amps	Watts			
GM-1227-3	3	240	0	1800	27	28.00	9.9	33	33	3	8	23.5	18	29.3	11520	15-50	16700	

### OPTIONAL ACCESSORIES

ENVIROVENT 2 Optional

### CONTROLLER

Thermocouple: K  
 Clock: 60 Mhz  
 Voltage: 24 DC Relays  
 Output: 12 Volts DC  
 Fuse: 0.5 AMP



Print this page