




# PRODUCT SPECIFICATION GM-1414

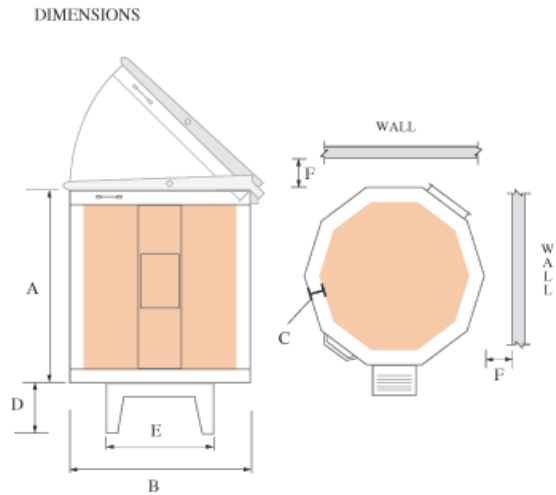

## SPECIFICATIONS & DIMENSIONS

MODEL	Phase	Volts	Maximum		Chamber			O.D.Dimension						Power		Copper Wire Size	NEMA Recp. Conf.	BTU's
			Cone	Temp	Depth	Opening Width	Cu.Ft.	A	B	C	D	E	F	Amps	Watts			
GM-1414	3	208		1800	13.5	42.00	6.7	18.5	46.5 x 29.5	2.5	8	2 - 17.5	18	23.1	8320	10	15-50	17400

### OPTIONAL ACCESSORIES

1414 ROLLING KILN STAND	Optional
ADJUSTABLE	Optional
ENVIROVENT 2	Optional

### CONTROLLER

Thermocouple: K  
 Clock: 60 Mhz  
 Voltage: 24 DC Relays  
 Output: 12 Volts DC  
 Fuse: 0.5 AMP



Print this page