




SKUTT
CERAMIC PRODUCTS

PRODUCT SPECIFICATION. KM-1027



DIMENSIONS

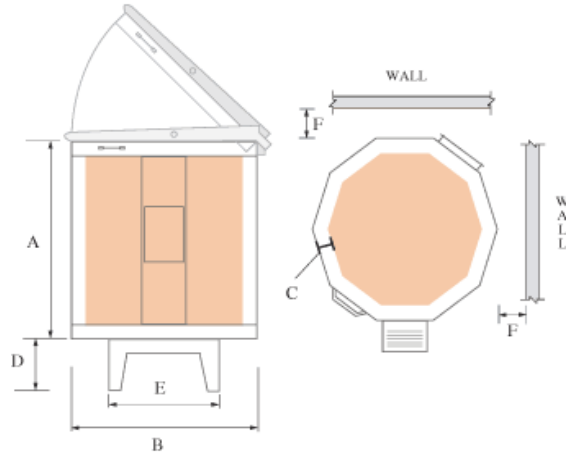

SPECIFICATIONS & DIMENSIONS

MODEL	Phase	Volts	Maximum		Chamber			O.D.Dimension						Power		Copper Wire Size	NEMA Recp. Conf.	BTU's
			Cone	Temp	Depth	Opening Width	Cu.Ft.	A	B	C	D	E	F	Amps	Watts			
KM-1027	1	240	10	2350	27	23.00	7	32	28.5	2.5	8	17	18	48	11520	6	6-50	22000

OPTIONAL ACCESORIES

1027 ROLLING KILN STAND	Optional
ENVIROLINK	Optional
ENVIROVENT 2	Optional
KILNLINK BOX PACKAGE	Optional
LINKBOARD SERVICE 1 YEAR	Optional
LINKBOARD SERVICE 5 YEAR	Optional

CONTROLLER

Thermocouple: K
 Clock: 60 Mhz
 Voltage: 24 DC Relays
 Output: 12 Volts DC
 Fuse: 1 AMP



Print this page