




PRODUCT SPECIFICATION. KM-818-30A-3



DIMENSIONS

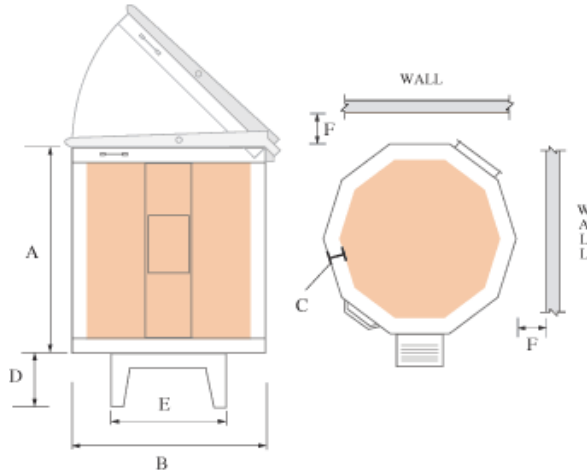

SPECIFICATIONS & DIMENSIONS

| MODEL | Phase | Volts | Maximum | | Chamber | | | O.D.Dimension | | | | | | Power | | NEMA Recp. Conf. | BTU's |
|--------------|-------|-------|---------|------|---------|---------------|--------|---------------|------|---|---|----|----|-------|-------|------------------|-------|
| | | | Cone | Temp | Depth | Opening Width | Cu.Ft. | A | B | C | D | E | F | Amps | Watts | | |
| KM-818-30A-3 | 1 | 240 | 8 | 2300 | 18 | 17.00 | 2.3 | 24 | 22.5 | 3 | 8 | 16 | 18 | 21.7 | 5200 | 6-30 | 10690 |
| | | | | | | | | | | | | | | | | | |

OPTIONAL ACCESSORIES

| | |
|--------------------------|----------|
| ENVIROLINK | Optional |
| ENVIROVENT 2 | Optional |
| LINKBOARD SERVICE 1 YEAR | Optional |
| LINKBOARD SERVICE 5 YEAR | Optional |

CONTROLLER

Thermocouple: K
 Clock: 60 Mhz
 Voltage: 24 DC Relays
 Output: 12 Volts DC
 Fuse: 0.5 AMP

