




SKUTT
CERAMIC PRODUCTS

PRODUCT SPECIFICATION: KM-818-30A-3



DIMENSIONS

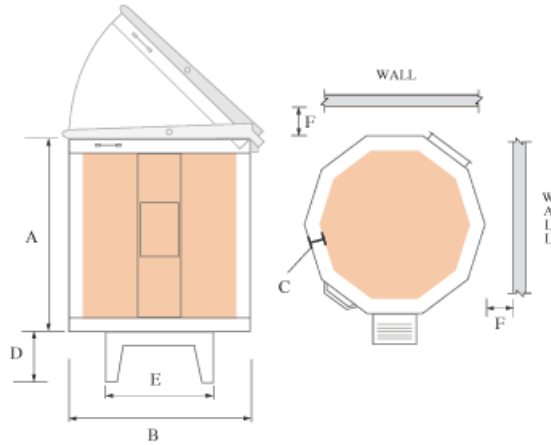

SPECIFICATIONS & DIMENSIONS

MODEL	Phase	Volts	Maximum		Chamber			O.D.Dimension						Power		Copper Wire Size	NEMA Recp. Conf.	BTU's
			Cone	Temp	Depth	Opening Width	Cu.Ft.	A	B	C	D	E	F	Amps	Watts			
KM-818-30A-3	1	240	8	2300	18	17.00	2.3	24	22.5	3	8	16	18	21.7	5200	10	6-30	10690

OPTIONAL ACCESORIES

ENVIROLINK	Optional
ENVIROVENT 2	Optional
KILNLINK BOX PACKAGE	Optional
LINKBOARD SERVICE 1 YEAR	Optional
LINKBOARD SERVICE 5 YEAR	Optional

CONTROLLER

Thermocouple: K
 Clock: 60 Mhz
 Voltage: 24 DC Relays
 Output: 12 Volts DC
 Fuse: 1 AMP

