




PRODUCT SPECIFICATION KM-614-3

DIMENSIONS

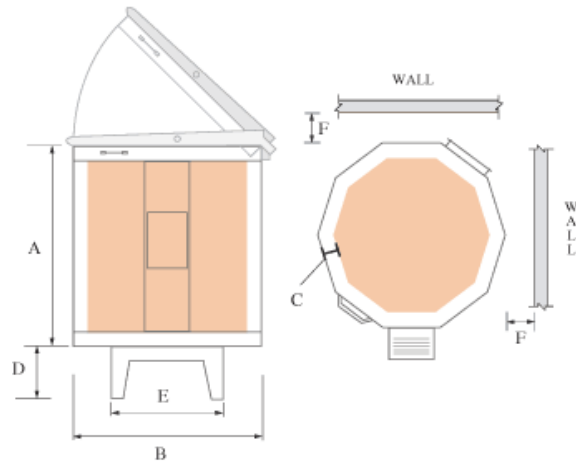

SPECIFICATIONS & DIMENSIONS

MODEL	Phase	Volts	Maximum		Chamber			O.D.Dimension							Power		Copper Wire Size	NEMA Recp. Conf.	BTU's
KM-614-3	1	115	Cone	Temp	Depth	Opening Width	Cu.Ft.	A	B	C	D	E	F	Amps	Watts	10	5-20	5940	
			6	2250	13.5	11.00	0.8	19.5	17	3	8	17	18	20	2300				

OPTIONAL ACCESORIES

LINKBOARD SERVICE 1 YEAR Optional
LINKBOARD SERVICE 5 YEAR Optional

CONTROLLER

Thermocouple: K
Clock: 60 Mhz
Voltage: 24 DC Relays
Output: 12 Volts DC
Fuse: 0.5 AMP



Print this page