




PRODUCT SPECIFICATION: KM-1227PK

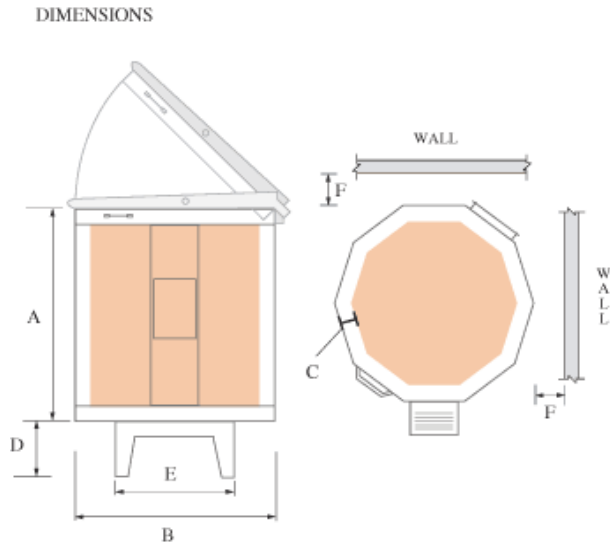

SPECIFICATIONS & DIMENSIONS

| MODEL | Phase | Volts | Maximum | | Chamber | | | O.D.Dimension | | | | | | Power | | NEMA Recp. Conf. | BTU's |
|-----------|-------|-------|---------|------|---------|---------------|--------|---------------|----|---|---|----|----|-------|-------|------------------|-------|
| | | | Cone | Temp | Depth | Opening Width | Cu.Ft. | A | B | C | D | E | F | Amps | Watts | | |
| KM-1227PK | 1 | 240 | 10 | 2350 | 27 | 28.00 | 9.9 | 33 | 34 | 3 | 8 | 24 | 18 | 60 | 14300 | Direct Wire | 24540 |
| | | | | | | | | | | | | | | | | | |

OPTIONAL ACCESSORIES

| | |
|--------------------------|----------|
| 1227 ROLLING KILN STAND | Optional |
| ENVIROLINK | Optional |
| ENVIROVENT 2 | Optional |
| LINKBOARD SERVICE 1 YEAR | Optional |
| LINKBOARD SERVICE 5 YEAR | Optional |

CONTROLLER

Thermocouple: K
 Clock: 60 Mhz
 Voltage: 24 DC Relays
 Output: 12 Volts DC
 Fuse: 0.5 AMP



Print this page