




SKUTT
CERAMIC PRODUCTS

PRODUCT SPECIFICATION: KM-1227-3 PK



DIMENSIONS

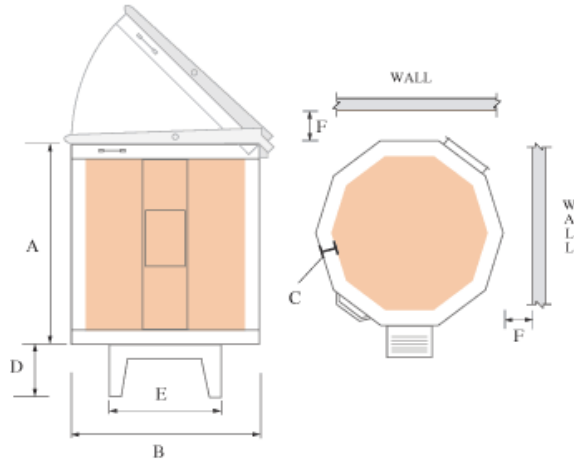

SPECIFICATIONS & DIMENSIONS

MODEL	Phase	Volts	Maximum		Chamber			O.D.Dimension						Power		Copper Wire Size	NEMA Recp. Conf.	BTU's
			Cone	Temp	Depth	Opening Width	Cu.Ft.	A	B	C	D	E	F	Amps	Watts			
KM-1227-3 PK	1	240	10	2350	27	28.00	9.9	33	34	3	8	24	18	60	14300	4	Direct Wire	24540

OPTIONAL ACCESORIES

1227 ROLLING KILN STAND	Optional
ENVIROVENT 2	Optional
KILNLINK BOX PACKAGE	Optional
LINKBOARD SERVICE 1 YEAR	Optional
LINKBOARD SERVICE 5 YEAR	Optional

CONTROLLER

Thermocouple: K
 Clock: 60 Mhz
 Voltage: 24 DC Relays
 Output: 12 Volts DC
 Fuse: 2 AMP



Print this page