




PRODUCT SPECIFICATION: KM-1627PK-3 LF



DIMENSIONS

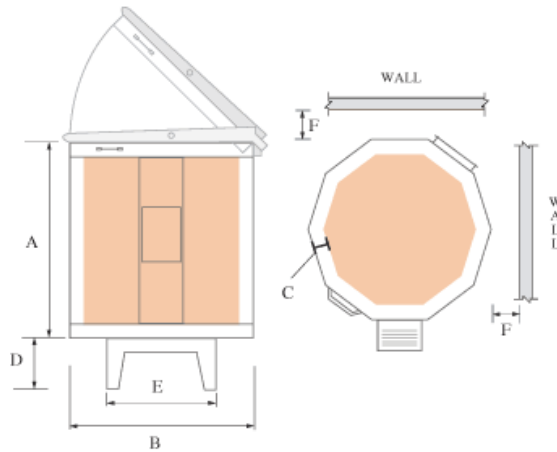

SPECIFICATIONS & DIMENSIONS

MODEL	Phase	Volts	Maximum		Chamber			O.D.Dimension						Power		Copper Wire Size	NEMA Recp. Conf.	BTU's
			Cone	Temp	Depth	Opening Width	Cu.Ft.	A	B	C	D	E	F	Amps	Watts			
KM-1627PK-3 LF	3	240	1	2100	27	46.00	18.5	33	52 x 36	3	8	48 x 30	18	46	16300	6	Direct Wire	31000

OPTIONAL ACCESORIES

1627 ROLLING STAND	Optional
ENVIROVENT 2	Optional
KILNLINK BOX PACKAGE	Optional
LINKBOARD SERVICE 1 YEAR	Optional
LINKBOARD SERVICE 5 YEAR	Optional

CONTROLLER

Thermocouple:
 Clock: 60 Mhz
 Voltage: DC Relays
 Output: Volts DC
 Fuse: AMP

