




SKUTT
CERAMIC PRODUCTS

PRODUCT SPECIFICATION: KM-1627PKLF



DIMENSIONS

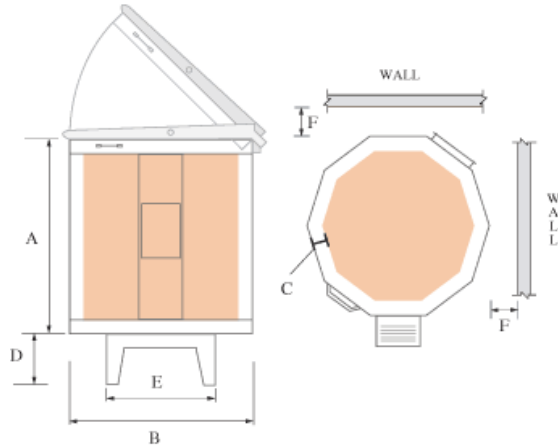

SPECIFICATIONS & DIMENSIONS

MODEL	Phase	Volts	Maximum		Chamber			O.D.Dimension						Power		Copper Wire Size	NEMA Recp. Conf.	BTU's	
			Cone	Temp	Depth	Opening Width	Cu.Ft.	A	B	C	D	E	F	Amps	Watts				
KM-1627PKLF	3	240	1	2100	27	46.00	18.5	33	52 x 36	3	8	3	48 x 30	18	46	16300	6	Direct Wire	31000

OPTIONAL ACCESORIES

1627 ROLLING STAND	Optional
ENVIROLINK	Optional
ENVIROVENT 2	Optional
LID LIFTER KIT FOR 1627	Optional
KILNS	Optional
LINKBOARD SERVICE 1 YEAR	Optional
LINKBOARD SERVICE 5 YEAR	Optional

CONTROLLER

Thermocouple:
 Clock: 60 Mhz
 Voltage: 0 DC Relays
 Output: 0 Volts DC
 Fuse: 0.5 AMP

