




SKUTT
CERAMIC PRODUCTS

PRODUCT SPECIFICATION: KM-1627PK

DIMENSIONS

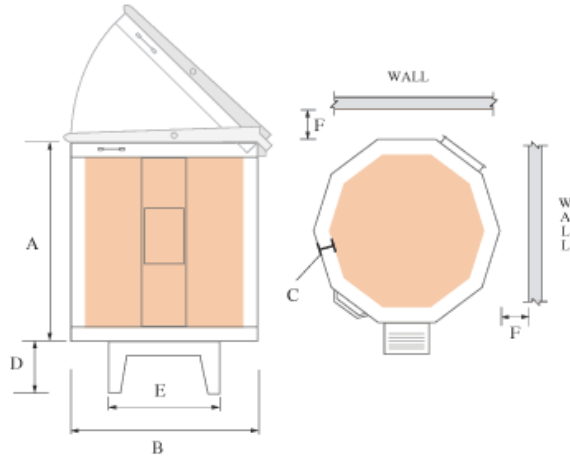

SPECIFICATIONS & DIMENSIONS

MODEL	Phase	Volts	Maximum		Chamber			O.D.Dimension						Power		Copper Wire Size	NEMA Recp. Conf.	BTU's
			Cone	Temp	Depth	Opening Width	Cu.Ft.	A	B	C	D	E	F	Amps	Watts			
KM-1627PK	3	240	10	2350	27	46.00	18.5	33	52 x 36	3	8	48 x 30	18	66	23600	3	Direct Wire	36600

OPTIONAL ACCESORIES

1627 ROLLING STAND	Optional
ENVIROLINK	Optional
ENVIROVENT 2	Optional
LID LIFTER KIT FOR 1627	Optional
KILNS	Optional
LINKBOARD SERVICE 1 YEAR	Optional
LINKBOARD SERVICE 5 YEAR	Optional

CONTROLLER

Thermocouple: K
 Clock: 60 Mhz
 Voltage: 24 DC Relays
 Output: 12 Volts DC
 Fuse: 0.5 AMP



Print this page