




**SKUTT**  
CERAMIC PRODUCTS

# PRODUCT SPECIFICATION: KM-1627-3 PK

## DIMENSIONS

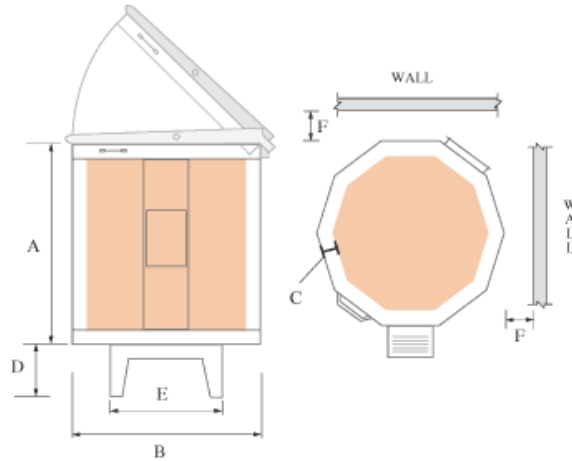

## SPECIFICATIONS & DIMENSIONS

MODEL	Phase	Volts	Maximum		Chamber			O.D.Dimension						Power		Copper Wire Size	NEMA Recp. Conf.	BTU's		
			Cone	Temp	Depth	Opening Width	Cu.Ft.	A	B	C	D	E	F	Amps	Watts					
KM-1627-3 PK	3	208	10	2350	27	46.00	18.5	33	52	36	3	8	30	48	18	76	23600	3	Direct Wire	36600

### OPTIONAL ACCESORIES

1627 ROLLING STAND	Optional
ENVIROVENT 2	Optional
KILNLINK BOX PACKAGE	Optional
LINKBOARD SERVICE 1 YEAR	Optional
LINKBOARD SERVICE 5 YEAR	Optional

### CONTROLLER

Thermocouple: K  
 Clock: 60 Mhz  
 Voltage: 24 DC Relays  
 Output: 12 Volts DC  
 Fuse: 2 AMP

