




# PRODUCT SPECIFICATION. KM-1218



DIMENSIONS

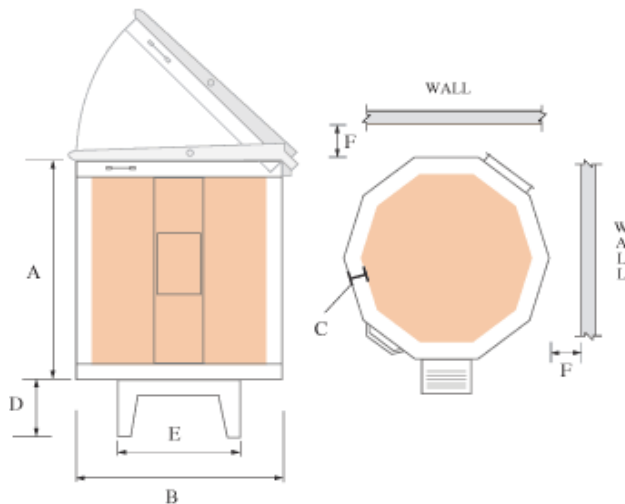

SPECIFICATIONS & DIMENSIONS

| MODEL   | Phase | Volts | Maximum |      | Chamber |               | O.D.Dimension | Power  |    | NEMA Recp. Conf. | BTU's |    |    |      |      |       |       |
|---------|-------|-------|---------|------|---------|---------------|---------------|--------|----|------------------|-------|----|----|------|------|-------|-------|
|         |       |       | Cone    | Temp | Depth   | Opening Width |               | Cu.Ft. | A  |                  |       | B  | C  | D    | E    | F     | Amps  |
| KM-1218 | 3     | 208   | 10      | 2350 | 18      | 28.00         | 6.6           | 24     | 34 | 3                | 8     | 24 | 18 | 29.5 | 9984 | 15-50 | 19690 |
|         |       |       |         |      |         |               |               |        |    |                  |       |    |    |      |      |       |       |

OPTIONAL ACCESORIES

|                          |          |
|--------------------------|----------|
| 1227 ROLLING KILN STAND  | Optional |
| ENVIROLINK               | Optional |
| ENVIROVENT 2             | Optional |
| LINKBOARD SERVICE 1 YEAR | Optional |
| LINKBOARD SERVICE 5 YEAR | Optional |

CONTROLLER

Thermocouple: K  
 Clock: 60 Mhz  
 Voltage: 24 DC Relays  
 Output: 12 Volts DC  
 Fuse: 0.5 AMP

