




# PRODUCT SPECIFICATION: KM-1222



DIMENSIONS

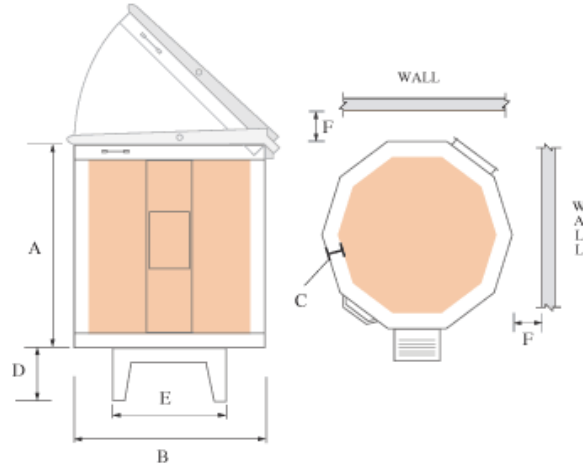

SPECIFICATIONS & DIMENSIONS

MODEL	Phase	Volts	Maximum		Chamber			O.D.Dimension						Power		Copper Wire Size	NEMA Recp. Conf.	BTU's
			Cone	Temp	Depth	Opening Width	Cu.Ft.	A	B	C	D	E	F	Amps	Watts			
KM-1222	1	240	10	2350	22	28.00	8.1	28	34	3	8	24	18	48	11520	6	6-50	22120

OPTIONAL ACCESORIES

1227 ROLLING KILN STAND	Optional
ENVIROLINK	Optional
ENVIROVENT 2	Optional
KILNLINK BOX PACKAGE	Optional
LINKBOARD SERVICE 1 YEAR	Optional
LINKBOARD SERVICE 5 YEAR	Optional
APM ELEMENT UPGRADE	Optional

CONTROLLER

Thermocouple: K  
 Clock: 60 Mhz  
 Voltage: 24 DC Relays  
 Output: 12 Volts DC  
 Fuse: 1 AMP

