




SKUTT
CERAMIC PRODUCTS

PRODUCT SPECIFICATION: KM-1022-3



DIMENSIONS

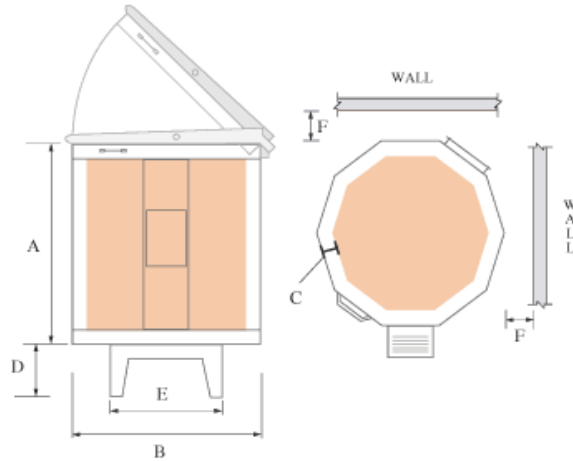

SPECIFICATIONS & DIMENSIONS

| MODEL | Phase | Volts | Maximum | | Chamber | | | O.D.Dimension | | | | | | Power | | Copper Wire Size | NEMA Recp. Conf. | BTU's |
|-----------|-------|-------|---------|------|---------|---------------|--------|---------------|----|---|---|----|----|-------|-------|------------------|------------------|-------|
| | | | Cone | Temp | Depth | Opening Width | Cu.Ft. | A | B | C | D | E | F | Amps | Watts | | | |
| KM-1022-3 | 3 | 240 | 10 | 2350 | 22 | 22.00 | 5.25 | 28 | 28 | 3 | 8 | 17 | 18 | 34.6 | 11520 | 8 | 15-50 | 16940 |
| | | | | | | | | | | | | | | | | | | |

OPTIONAL ACCESORIES

| | |
|--------------------------|----------|
| 1027 ROLLING KILN STAND | Optional |
| ENVIROLINK | Optional |
| ENVIROVENT 2 | Optional |
| KILNLINK BOX PACKAGE | Optional |
| LINKBOARD SERVICE 1 YEAR | Optional |
| LINKBOARD SERVICE 5 YEAR | Optional |

CONTROLLER

Thermocouple: K
 Clock: 60 Mhz
 Voltage: 24 DC Relays
 Output: 12 Volts DC
 Fuse: 1 AMP



Print this page