




# PRODUCT SPECIFICATION: KM-822-3



DIMENSIONS

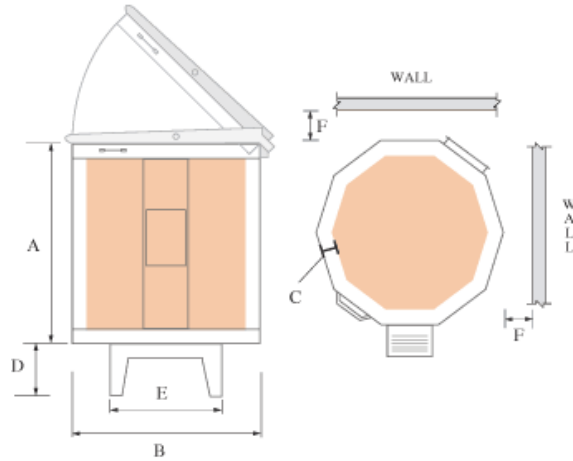

SPECIFICATIONS & DIMENSIONS

| MODEL    | Phase | Volts | Maximum |      | Chamber |               |        | O.D.Dimension |      |   |   |    |    | Power |       | Copper Wire Size | NEMA Recp. Conf. | BTU's |
|----------|-------|-------|---------|------|---------|---------------|--------|---------------|------|---|---|----|----|-------|-------|------------------|------------------|-------|
|          |       |       | Cone    | Temp | Depth   | Opening Width | Cu.Ft. | A             | B    | C | D | E  | F  | Amps  | Watts |                  |                  |       |
| KM-822-3 | 1     | 208   | 10      | 2350 | 22      | 17.00         | 2.9    | 28            | 22.5 | 3 | 8 | 17 | 18 | 38.5  | 8000  | 8                | 6-50             | 12260 |
|          |       |       |         |      |         |               |        |               |      |   |   |    |    |       |       |                  |                  |       |

OPTIONAL ACCESORIES

|                          |          |
|--------------------------|----------|
| ENVIROLINK               | Optional |
| ENVIROVENT 2             | Optional |
| KILNLINK BOX PACKAGE     | Optional |
| LINKBOARD SERVICE 1 YEAR | Optional |
| LINKBOARD SERVICE 5 YEAR | Optional |

CONTROLLER

Thermocouple: K  
 Clock: 60 Mhz  
 Voltage: 24 DC Relays  
 Output: 12 Volts DC  
 Fuse: 1 AMP

