




PRODUCT SPECIFICATION: GM-818-3CR-SSR

DIMENSIONS

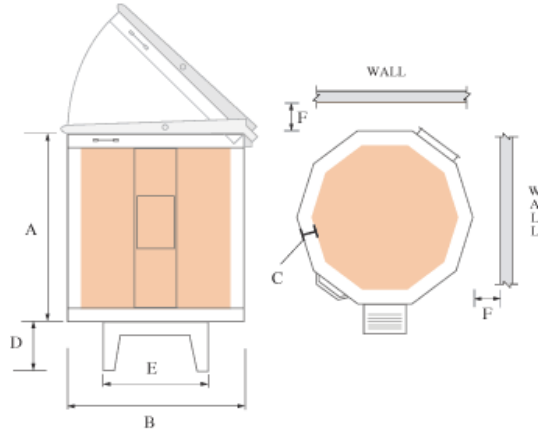

SPECIFICATIONS & DIMENSIONS

MODEL	Phase	Volts	Maximum		Chamber			O.D.Dimension						Power		Copper Wire Size	NEMA Recp. Conf.	BTU's
			Cone	Temp	Depth	Opening Width	Cu.Ft.	A	B	C	D	E	F	Amps	Watts			
GM-818-3CR-SSR	1	240	10	2350	18	17.00	2.3	24	22.5	3	8	17	18	30	7200	8	6-50	10700

OPTIONAL ACCESSORIES

CONTROLLER

Thermocouple: S
 Clock: 60 Mhz
 Voltage: 24 DC Relays
 Output: 12 Volts DC
 Fuse: AMP

