




**SKUTT**  
CERAMIC PRODUCTS

# PRODUCT SPECIFICATION: KMT-1427-3

## DIMENSIONS

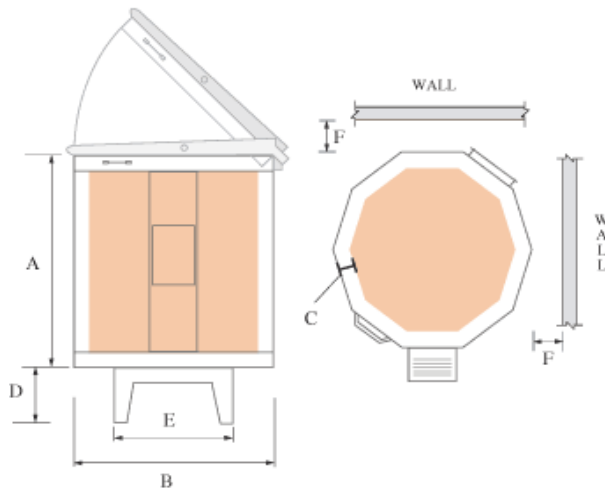

## SPECIFICATIONS & DIMENSIONS

| MODEL      | Phase | Volts | Maximum |      | Chamber |               |        | O.D. Dimension |   |   |   |   |   | Power |       | NEMA Recp. Conf. | BTU's     |       |
|------------|-------|-------|---------|------|---------|---------------|--------|----------------|---|---|---|---|---|-------|-------|------------------|-----------|-------|
|            |       |       | Cone    | Temp | Depth   | Opening Width | Cu.Ft. | A              | B | C | D | E | F | Amps  | Watts |                  |           |       |
| KMT-1427-3 | 1     | 240   | 10      | 2350 | 27      | 40.00         | 12.75  |                |   |   |   |   |   |       | 80    | 19000            | Hardwired | 29795 |
|            |       |       |         |      |         |               |        |                |   |   |   |   |   |       |       |                  |           |       |

## OPTIONAL ACCESSORIES

|                          |          |
|--------------------------|----------|
| ENVIROLINK               | Optional |
| ENVIROVENT 2             | Optional |
| LINKBOARD SERVICE 1 YEAR | Optional |
| LINKBOARD SERVICE 5 YEAR | Optional |

## CONTROLLER

Thermocouple: K  
 Clock: 60 Mhz  
 Voltage: 0 DC Relays  
 Output: 0 Volts DC  
 Fuse: 0 AMP



Print this page