




# PRODUCT SPECIFICATION. KMT-1027-3



DIMENSIONS

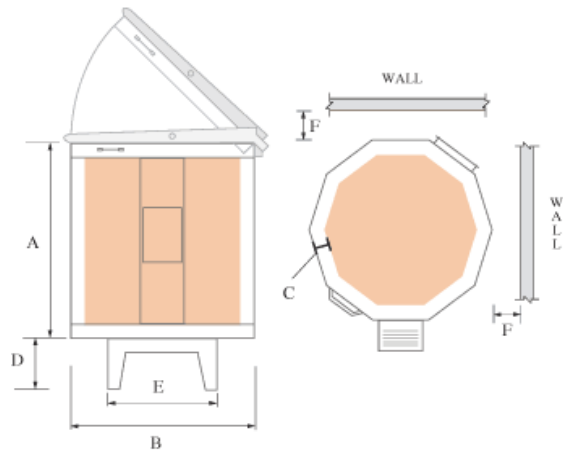

## SPECIFICATIONS & DIMENSIONS

| MODEL      | Phase | Volts | Maximum |      | Chamber |               |        | O.D.Dimension |      |   |   |    |    | Power |       | Copper Wire Size | NEMA Recp. Conf. | BTU's |
|------------|-------|-------|---------|------|---------|---------------|--------|---------------|------|---|---|----|----|-------|-------|------------------|------------------|-------|
| KMT-1027-3 | 1     | 240   | Cone    | Temp | Depth   | Opening Width | Cu.Ft. | A             | B    | C | D | E  | F  | Amps  | Watts | 6                | 6-50             | 18940 |
|            |       |       | 10      | 2350 | 27      | 22.00         | 6.4    | 33            | 28.5 | 3 | 8 | 17 | 18 | 48    | 11520 |                  |                  |       |

## OPTIONAL ACCESORIES

|                          |          |
|--------------------------|----------|
| 1027 ROLLING KILN STAND  | Optional |
| ENVIROLINK               | Optional |
| ENVIROVENT 2             | Optional |
| LINKBOARD SERVICE 1 YEAR | Optional |
| LINKBOARD SERVICE 5 YEAR | Optional |

## CONTROLLER

Thermocouple: K  
 Clock: 60 Mhz  
 Voltage: 24 DC Relays  
 Output: 12 Volts DC  
 Fuse: 0.5 AMP



Print this page