




SKUTT
CERAMIC PRODUCTS

PRODUCT SPECIFICATION: KMT-1027-3



DIMENSIONS

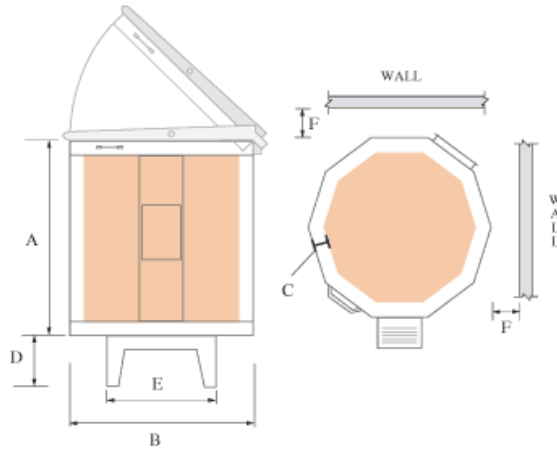

SPECIFICATIONS & DIMENSIONS

MODEL	Phase	Volts	Maximum		Chamber			O.D.Dimension						Power		Copper Wire Size	NEMA Recp. Conf.	BTU's
			Cone	Temp	Depth	Opening Width	Cu.Ft.	A	B	C	D	E	F	Amps	Watts			
KMT-1027-3	3	208	10	2350	27	22.00	6.4	33	28.5	3	8	17	18	31.7	11000	8	15-50	18940

OPTIONAL ACCESORIES

1027 ROLLING KILN STAND	Optional
ENVIROLINK	Optional
ENVIROVENT 2	Optional
LINKBOARD SERVICE 1 YEAR	Optional
LINKBOARD SERVICE 5 YEAR	Optional

CONTROLLER

Thermocouple: K
 Clock: 60 Mhz
 Voltage: 24 DC Relays
 Output: 12 Volts DC
 Fuse: 0.5 AMP



Print this page