




SKUTT
CERAMIC PRODUCTS

PRODUCT SPECIFICATION: KMT-818



DIMENSIONS

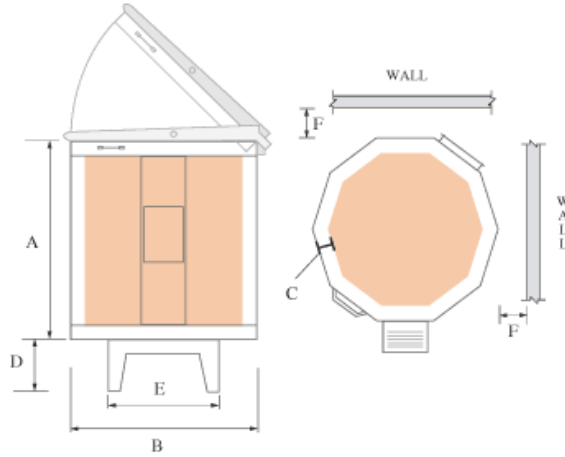

SPECIFICATIONS & DIMENSIONS

MODEL	Phase	Volts	Maximum		Chamber			O.D.Dimension						Power		Copper Wire Size	NEMA Recp. Conf.	BTU's
			Cone	Temp	Depth	Opening Width	Cu.Ft.	A	B	C	D	E	F	Amps	Watts			
KMT-818	1	240	10	2350	18	18.00	2.6	23	22.5	2.5	8	16	18	26.7	6400	8	6-50	12500

OPTIONAL ACCESORIES

ENVIROLINK	Optional
ENVIROVENT 2	Optional
LINKBOARD SERVICE 1 YEAR	Optional
LINKBOARD SERVICE 5 YEAR	Optional

CONTROLLER

Thermocouple: K
 Clock: 60 Mhz
 Voltage: 24 DC Relays
 Output: 12 Volts DC
 Fuse: 1 AMP



Print this page