




**SKUTT**  
CERAMIC PRODUCTS

# PRODUCT SPECIFICATION: KMT-714



DIMENSIONS

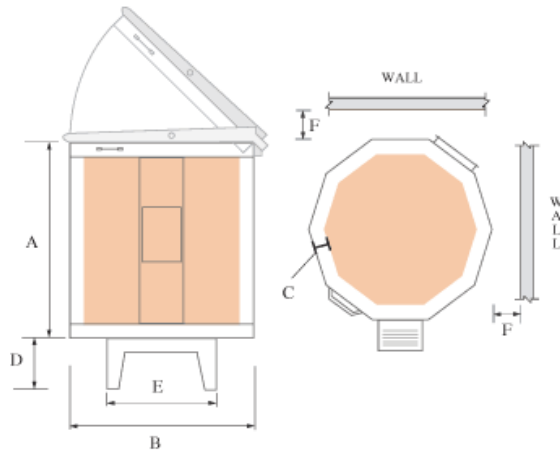

**SPECIFICATIONS & DIMENSIONS**

| MODEL   | Phase | Volts   | Maximum |      | Chamber |               |        | O.D.Dimension |      |     |   |    |    | Power |       | Copper Wire Size | NEMA Recp. Conf. | BTU's |
|---------|-------|---------|---------|------|---------|---------------|--------|---------------|------|-----|---|----|----|-------|-------|------------------|------------------|-------|
|         |       |         | Cone    | Temp | Depth   | Opening Width | Cu.Ft. | A             | B    | C   | D | E  | F  | Amps  | Watts |                  |                  |       |
| KMT-714 | 1     | 120/208 | 8       | 2300 | 13.5    | 14.00         | 1.4    | 18.5          | 19.5 | 2.5 | 8 | 17 | 18 | 20    | 3600  | 10               | 14-30            | 9500  |
|         |       |         |         |      |         |               |        |               |      |     |   |    |    |       |       |                  |                  |       |

**OPTIONAL ACCESORIES**

|                           |          |
|---------------------------|----------|
| 714 ROLLING STAND NON ADJ | Optional |
| LINKBOARD SERVICE 1 YEAR  | Optional |
| LINKBOARD SERVICE 5 YEAR  | Optional |

**CONTROLLER**

Thermocouple: K  
 Clock: 60 Mhz  
 Voltage: 24 DC Relays  
 Output: 12 Volts DC  
 Fuse: 1 AMP



Print this page