




**SKUTT**  
CERAMIC PRODUCTS

# PRODUCT SPECIFICATION: KMT-1231PK



DIMENSIONS

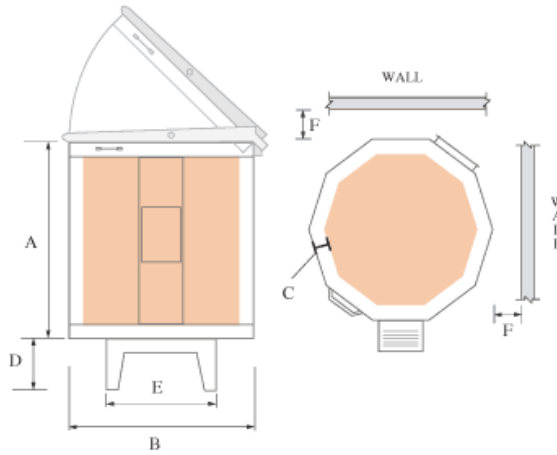

**SPECIFICATIONS & DIMENSIONS**

MODEL	Phase	Volts	Maximum		Chamber			O.D.Dimension						Power		Copper Wire Size	NEMA Recp. Conf.	BTU's
			Cone	Temp	Depth	Opening Width	Cu.Ft.	A	B	C	D	E	F	Amps	Watts			
KMT-1231PK	3	240	10	2350	31	28.00	11.6	37	34	3	8	24	18	44.5	17300	6	Direct Wire	25800

**OPTIONAL ACCESORIES**

1227 ROLLING KILN STAND	Optional
ENVIROLINK	Optional
ENVIROVENT 2	Optional
LINKBOARD SERVICE 1 YEAR	Optional
LINKBOARD SERVICE 5 YEAR	Optional

**CONTROLLER**

Thermocouple: K  
 Clock: 60 Mhz  
 Voltage: 24 DC Relays  
 Output: 12 Volts DC  
 Fuse: 0.5 AMP



Print this page