




PRODUCT SPECIFICATION: KMT-1627PK



DIMENSIONS

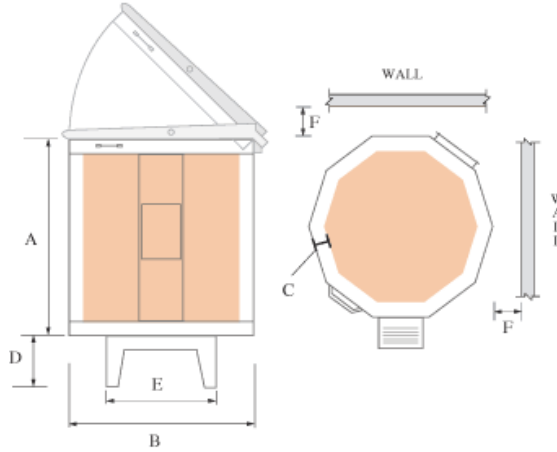

SPECIFICATIONS & DIMENSIONS

| MODEL | Phase | Volts | Maximum | | Chamber | | | O.D.Dimension | | | | | | Power | | Copper Wire Size | NEMA Recp. Conf. | BTU's |
|------------|-------|-------|---------|------|---------|---------------|--------|---------------|---------------|---|---|---------------|----|-------|-------|------------------|------------------|-------|
| | | | Cone | Temp | Depth | Opening Width | Cu.Ft. | A | B | C | D | E | F | Amps | Watts | | | |
| KMT-1627PK | 1 | 240 | 1 | 2100 | 27 | 46.00 | 18.5 | 33 | 52 x 36 | 3 | 8 | 48 x 30 | 18 | 68 | 16300 | 3 | Direct Wire | 31000 |
| | | | | | | | | | | | | | | | | | | |

OPTIONAL ACCESORIES

| | |
|-------------------------------|----------|
| 1627 ROLLING STAND | Optional |
| ENVIROLINK | Optional |
| ENVIROVENT 2 | Optional |
| LID LIFTER KIT FOR 1627 KILNS | Optional |
| LINKBOARD SERVICE 1 YEAR | Optional |
| LINKBOARD SERVICE 5 YEAR | Optional |

CONTROLLER

Thermocouple: K
 Clock: 60 Mhz
 Voltage: 0 DC Relays
 Output: 0 Volts DC
 Fuse: 0.5 AMP



Print this page