




**SKUTT**  
CERAMIC PRODUCTS

# PRODUCT SPECIFICATION: KMT-1627PKLF

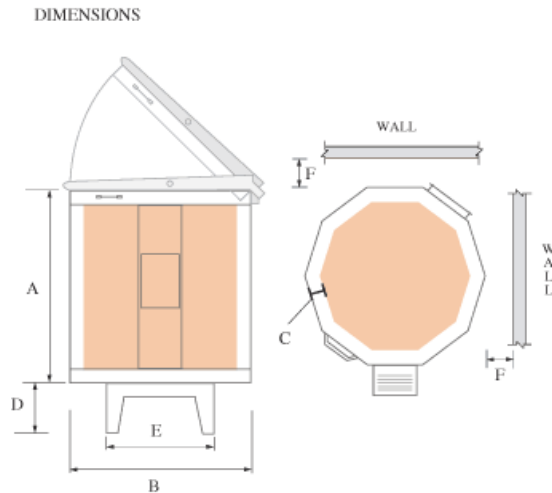

## SPECIFICATIONS & DIMENSIONS

MODEL	Phase	Volts	Maximum		Chamber			O.D.Dimension						Power		Copper Wire Size	NEMA Recp. Conf.	BTU's
			Cone	Temp	Depth	Opening Width	Cu.Ft.	A	B	C	D	E	F	Amps	Watts			
KMT-1627PKLF	1	240	1	2100	27	46.00	18.5	33	52 x 36	3	8	48 x 30	18	68	16300	3	Direct Wire	31000

### OPTIONAL ACESORIES

1627 ROLLING STAND	Optional
ENVIROLINK	Optional
ENVIROVENT 2	Optional
LID LIFTER KIT FOR 1627 KILNS	Optional
LINKBOARD SERVICE 1 YEAR	Optional
LINKBOARD SERVICE 5 YEAR	Optional

### CONTROLLER

Thermocouple: K  
 Clock: 60 Mhz  
 Voltage: 0 DC Relays  
 Output: 0 Volts DC  
 Fuse: 0.5 AMP



Print this page