




**SKUTT**  
CERAMIC PRODUCTS

# PRODUCT SPECIFICATION: KMT-1627PKLF



DIMENSIONS

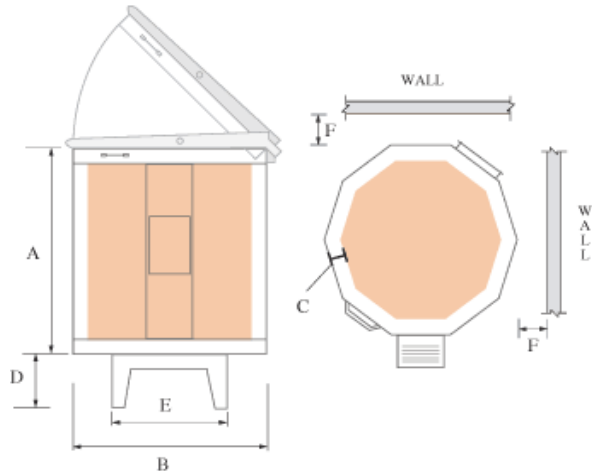

**SPECIFICATIONS & DIMENSIONS**

MODEL	Phase	Volts	Maximum		Chamber		O.D.Dimension						Power		NEMA Recp. Conf.	BTU's	
			Cone	Temp	Depth	Opening Width	Cu.Ft.	A	B	C	D	E	F	Amps			Watts
KMT-1627PKLF	1	208	1	2100	27	46.00	18.5	33	52 x 36	3	8	48 x 30	18	69	14300	Direct Wire	31000

**OPTIONAL ACCESSORIES**

1627 ROLLING STAND	Optional
ENVIROLINK	Optional
ENVIROVENT 2	Optional
LID LIFTER KIT FOR 1627 KILNS	Optional
LINKBOARD SERVICE 1 YEAR	Optional
LINKBOARD SERVICE 5 YEAR	Optional

**CONTROLLER**

Thermocouple: K  
 Clock: 60 Mhz  
 Voltage: 0 DC Relays  
 Output: 0 Volts DC  
 Fuse: 0.5 AMP



Print this page