




**SKUTT**  
CERAMIC PRODUCTS

# PRODUCT SPECIFICATION: KMT-1627PK



DIMENSIONS

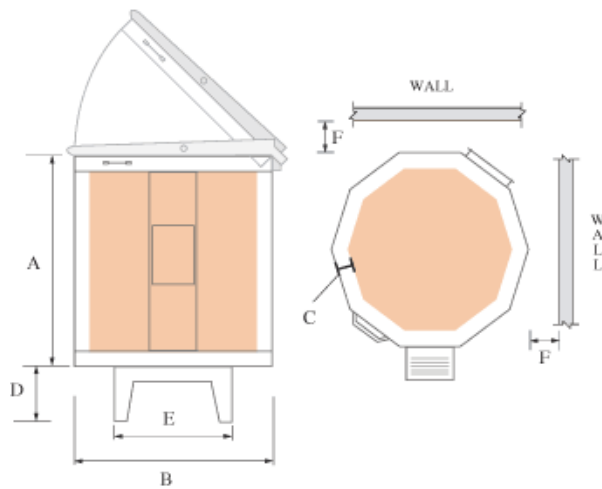

**SPECIFICATIONS & DIMENSIONS**

MODEL	Phase	Volts	Maximum		Chamber			O.D.Dimension						Power		NEMA Recp. Conf.	BTU's
			Cone	Temp	Depth	Opening Width	Cu.Ft.	A	B	C	D	E	F	Amps	Watts		
KMT-1627PK	3	208	10	2350	27	46.00	18.5	33	52 x 36	3	8	30	48 x 18	76	23600	Direct Wire	36600

**OPTIONAL ACCESORIES**

1627 ROLLING STAND	Optional
ENVIROLINK	Optional
ENVIROVENT 2	Optional
LID LIFTER KIT FOR 1627 KILNS	Optional
LINKBOARD SERVICE 1 YEAR	Optional
LINKBOARD SERVICE 5 YEAR	Optional

**CONTROLLER**

Thermocouple: K  
 Clock: 60 Mhz  
 Voltage: 24 DC Relays  
 Output: 12 Volts DC  
 Fuse: 0.5 AMP



Print this page