




SKUTT
CERAMIC PRODUCTS

PRODUCT SPECIFICATION: KMT-1022



DIMENSIONS

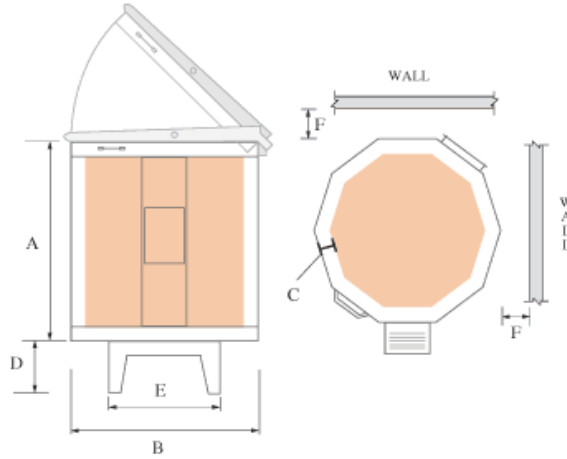

SPECIFICATIONS & DIMENSIONS

| MODEL | Phase | Volts | Maximum | | Chamber | | | O.D.Dimension | | | | | | Power | | Copper Wire Size | NEMA Recp. Conf. | BTU's |
|----------|-------|-------|---------|------|---------|---------------|--------|---------------|----|-----|---|----|----|-------|-------|------------------|------------------|-------|
| | | | Cone | Temp | Depth | Opening Width | Cu.Ft. | A | B | C | D | E | F | Amps | Watts | | | |
| KMT-1022 | 1 | 208 | 10 | 2350 | 22 | 23.00 | 5.7 | 27 | 28 | 2.5 | 8 | 17 | 18 | 48 | 9984 | 6 | 6-50 | 20130 |
| | | | | | | | | | | | | | | | | | | |

OPTIONAL ACCESORIES

| | |
|--------------------------|----------|
| 1027 ROLLING KILN STAND | Optional |
| ENVIROLINK | Optional |
| ENVIROVENT 2 | Optional |
| LINKBOARD SERVICE 1 YEAR | Optional |
| LINKBOARD SERVICE 5 YEAR | Optional |

CONTROLLER

Thermocouple: K
 Clock: 60 Mhz
 Voltage: 24 DC Relays
 Output: 12 Volts DC
 Fuse: 0.5 AMP



Print this page