




PRODUCT SPECIFICATION: KMT-822



DIMENSIONS

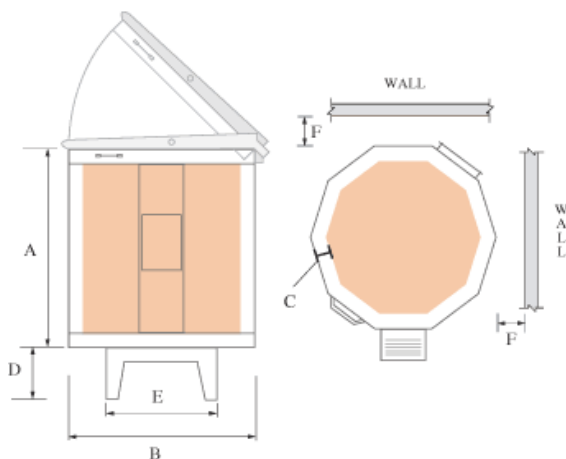

SPECIFICATIONS & DIMENSIONS

MODEL	Phase	Volts	Maximum		Chamber			O.D.Dimension							Power		Copper Wire Size	NEMA Recp. Conf.	BTU's
KMT-822	1	208	Cone	Temp	Depth	Opening Width	Cu.Ft.	A	B	C	D	E	F	Amps	Watts	8	6-50	12260	
			10	2350	22	18.00	3.2	27	22.5	2.5	8	17	18	38.5	8000				

OPTIONAL ACCESSORIES

ENVIROLINK	Optional
ENVIROVENT 2	Optional
LINKBOARD SERVICE 1 YEAR	Optional
LINKBOARD SERVICE 5 YEAR	Optional

CONTROLLER

Thermocouple: K
 Clock: 60 Mhz
 Voltage: 24 DC Relays
 Output: 12 Volts DC
 Fuse: 0.5 AMP



Print this page