




## PRODUCT SPECIFICATION: KMT-822-3



DIMENSIONS

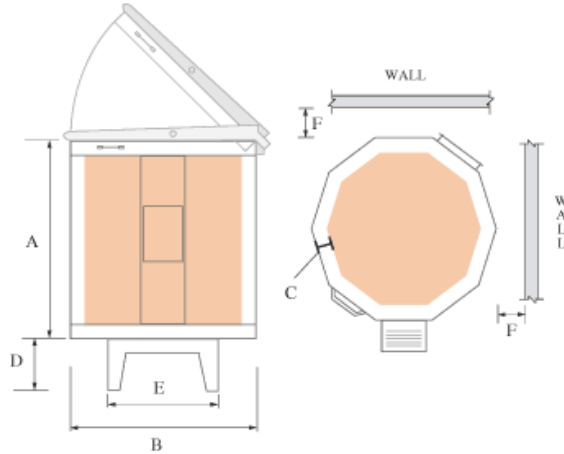

### SPECIFICATIONS & DIMENSIONS

| MODEL     | Phase | Volts | Maximum |      | Chamber |               |        | O.D.Dimension |      |   |   |    |    |      | Power |   | Copper Wire Size | NEMA Recp. Conf. | BTU's |
|-----------|-------|-------|---------|------|---------|---------------|--------|---------------|------|---|---|----|----|------|-------|---|------------------|------------------|-------|
| KMT-822-3 | 1     | 240   | Cone    | Temp | Depth   | Opening Width | Cu.Ft. | A             | B    | C | D | E  | F  | Amps | Watts | 8 | 6-50             | 12260            |       |
|           |       |       | 10      | 2350 | 22      | 17.00         | 2.9    | 28            | 22.5 | 3 | 8 | 17 | 18 | 33.4 | 8000  |   |                  |                  |       |

### OPTIONAL ACCESORIES

|                          |          |
|--------------------------|----------|
| ENVIROLINK               | Optional |
| ENVIROVENT 2             | Optional |
| LINKBOARD SERVICE 1 YEAR | Optional |
| LINKBOARD SERVICE 5 YEAR | Optional |

### CONTROLLER

Thermocouple: K  
 Clock: 60 Mhz  
 Voltage: 24 DC Relays  
 Output: 12 Volts DC  
 Fuse: 0.5 AMP



Print this page