




PRODUCT SPECIFICATION: KMT-822-3



DIMENSIONS

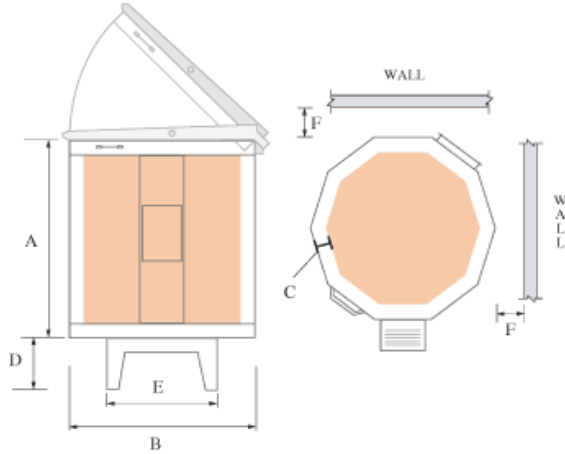

SPECIFICATIONS & DIMENSIONS

| MODEL | Phase | Volts | Maximum | | Chamber | | | O.D.Dimension | | | | | | Power | | Copper Wire Size | NEMA Recp. Conf. | BTU's |
|-----------|-------|-------|---------|------|---------|---------------|--------|---------------|------|---|---|----|----|-------|-------|------------------|------------------|-------|
| | | | Cone | Temp | Depth | Opening Width | Cu.Ft. | A | B | C | D | E | F | Amps | Watts | | | |
| KMT-822-3 | 1 | 208 | 10 | 2350 | 22 | 17.00 | 2.9 | 28 | 22.5 | 3 | 8 | 17 | 18 | 38.5 | 8000 | 8 | 6-50 | 12260 |
| | | | | | | | | | | | | | | | | | | |

OPTIONAL ACCESSORIES

| | |
|--------------------------|----------|
| ENVIROLINK | Optional |
| ENVIROVENT 2 | Optional |
| LINKBOARD SERVICE 1 YEAR | Optional |
| LINKBOARD SERVICE 5 YEAR | Optional |

CONTROLLER

Thermocouple: K
 Clock: 60 Mhz
 Voltage: 24 DC Relays
 Output: 12 Volts DC
 Fuse: 0.5 AMP

