




**SKUTT**  
GLASS KILNS

# PRODUCT SPECIFICATION: GMT-1014



DIMENSIONS

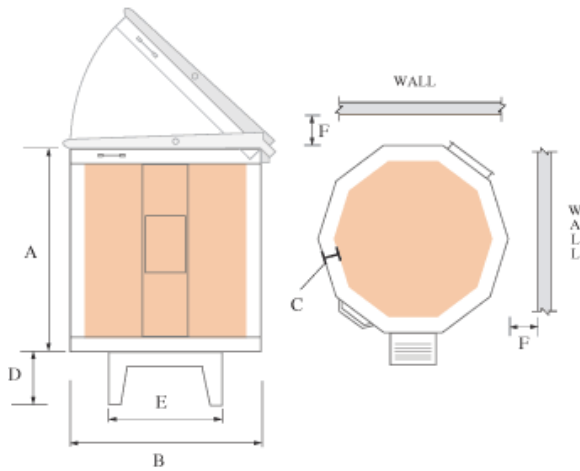

**SPECIFICATIONS & DIMENSIONS**

MODEL	Phase	Volts	Maximum		Chamber			O.D.Dimension						Power		NEMA Recp. Conf.	BTU's
			Cone	Temp	Depth	Opening Width	Cu.Ft.	A	B	C	D	E	F	Amps	Watts		
GMT-1014	1	208	0	1800	13.5	23.00	3.5	18.5	28.5	2.5	8	17.5	18	39.1	8140	6-50	10700

**OPTIONAL ACCESSORIES**

1014 ROLLING KILN STAND - ADJUSTABLE	Optional
ENVIROVENT 2	Optional

**CONTROLLER**

Thermocouple: K  
 Clock: 60 Mhz  
 Voltage: 24 DC Relays  
 Output: 12 Volts DC  
 Fuse: 0.5 AMP



Print this page