




PRODUCT SPECIFICATION: GMT-10FBD

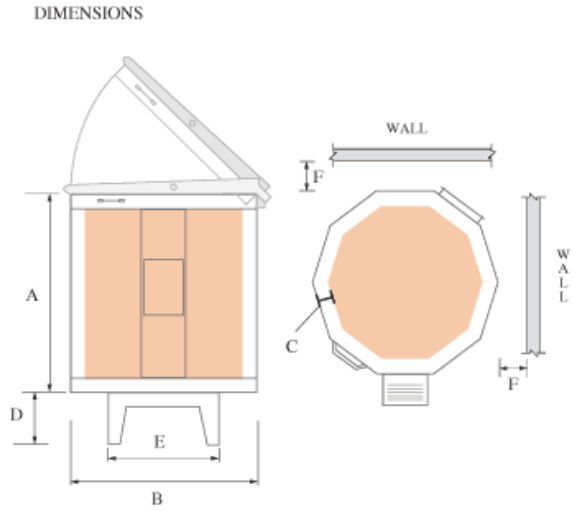

SPECIFICATIONS & DIMENSIONS

MODEL	Phase	Volts	Maximum		Chamber			O.D.Dimension						Power		Copper Wire Size	NEMA Recp. Conf.	BTU's	
			Cone	Temp	Depth	Opening Width	Cu.Ft.	A	B	C	D	E	F	Amps	Watts				
GMT-10FBD	1	115		1800	9	10.00	0.45	16	11	25 x 2.5				18	15	1725	12	5-15	3600

OPTIONAL ACCESORIES

CONTROLLER

Thermocouple: K
 Clock: 60 Mhz
 Voltage: 24 DC Relays
 Output: 12 Volts DC
 Fuse: 1 AMP



Print this page