




# PRODUCT SPECIFICATION: GMT-1227

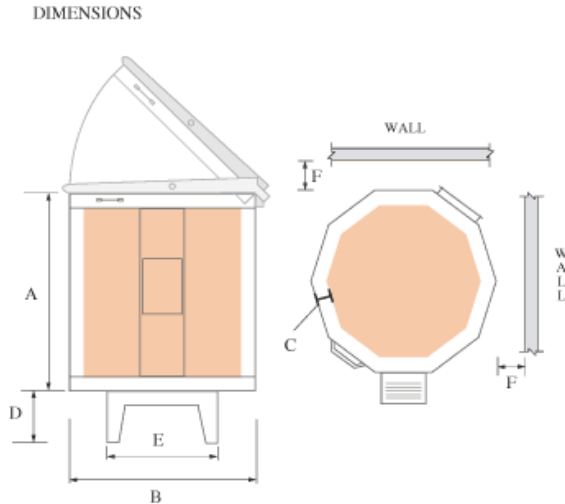

## SPECIFICATIONS & DIMENSIONS

MODEL	Phase	Volts	Maximum		Chamber			O.D.Dimension						Power		Copper Wire Size	NEMA Recp. Conf.	BTU's
			Cone	Temp	Depth	Opening Width	Cu.Ft.	A	B	C	D	E	F	Amps	Watts			
GMT-1227	1	240	0	1800	27	28.00	9.9	33	33	3	8	23.5	18	48	11520	6	6-50	16700

### OPTIONAL ACCESORIES

ENVIROVENT 2	Optional
--------------	----------

### CONTROLLER

Thermocouple: K  
 Clock: 60 Mhz  
 Voltage: 24 DC Relays  
 Output: 12 Volts DC  
 Fuse: 0.5 AMP



Print this page