




# PRODUCT SPECIFICATION: GMT-1018



DIMENSIONS

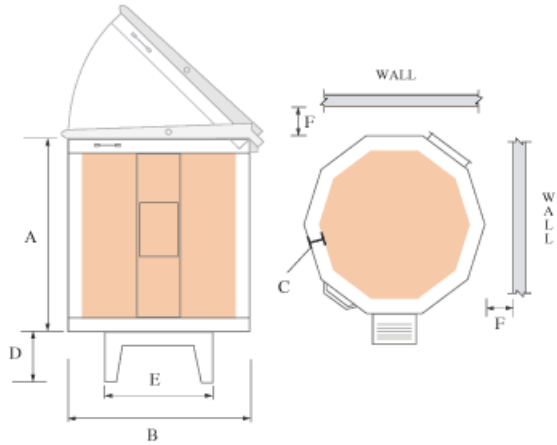

**SPECIFICATIONS & DIMENSIONS**

| MODEL    | Phase | Volts | Maximum |      | Chamber |               |        | O.D.Dimension |      |     |   |      |    | Power |       | Copper Wire Size | NEMA Recp. Conf. | BTU's |
|----------|-------|-------|---------|------|---------|---------------|--------|---------------|------|-----|---|------|----|-------|-------|------------------|------------------|-------|
|          |       |       | Cone    | Temp | Depth   | Opening Width | Cu.Ft. | A             | B    | C   | D | E    | F  | Amps  | Watts |                  |                  |       |
| GMT-1018 | 1     | 240   |         | 1800 | 18      | 23.00         | 4.6    | 23            | 28.5 | 2.5 | 8 | 17.5 | 18 | 39.4  | 9460  | 8                | 6-50             | 12100 |

**OPTIONAL ACCESORIES**

ENVIROVENT 2      Optional

**CONTROLLER**

Thermocouple: K  
 Clock: 60 Mhz  
 Voltage: 24 DC Relays  
 Output: 12 Volts DC  
 Fuse: 0.5 AMP

