




# PRODUCT SPECIFICATION: GMT-1018



DIMENSIONS

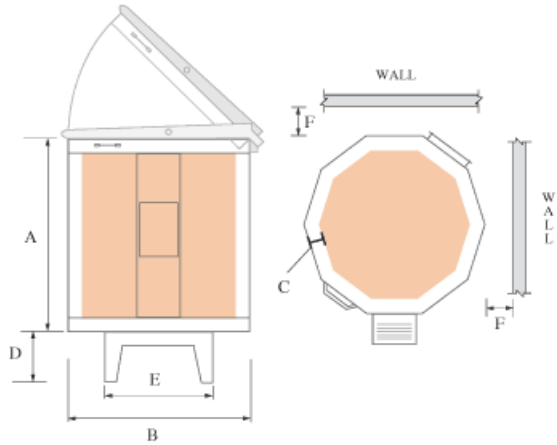

**SPECIFICATIONS & DIMENSIONS**

MODEL	Phase	Volts	Maximum		Chamber			O.D.Dimension						Power		Copper Wire Size	NEMA Recp. Conf.	BTU's
			Cone	Temp	Depth	Opening Width	Cu.Ft.	A	B	C	D	E	F	Amps	Watts			
GMT-1018	1	208		1800	18	23.00	4.6	23	28.5	2.5	8	17.5	18	40	8320	8	6-50	12100

**OPTIONAL ACCESORIES**

ENVIROVENT 2	Optional
--------------	----------

**CONTROLLER**

Thermocouple: K  
 Clock: 60 Mhz  
 Voltage: 24 DC Relays  
 Output: 12 Volts DC  
 Fuse: 0.5 AMP

