




PRODUCT SPECIFICATION: GMT-818



DIMENSIONS

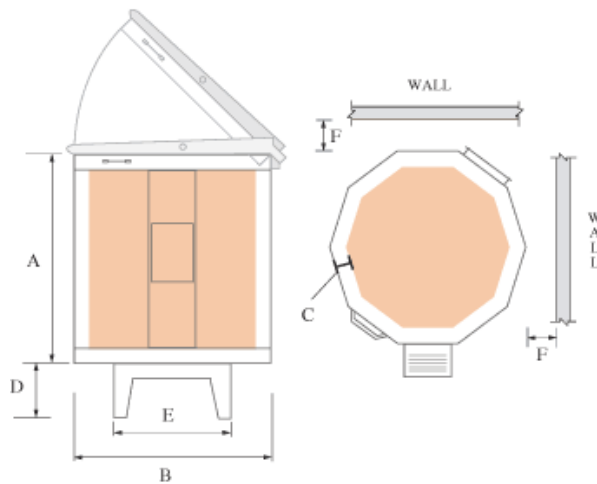

SPECIFICATIONS & DIMENSIONS

| MODEL | Phase | Volts | Maximum | | Chamber | | | O.D.Dimension | | | | | | Power | | NEMA Recp. Conf. | BTU's |
|---------|-------|-------|---------|------|---------|---------------|--------|---------------|------|-----|---|------|----|-------|-------|------------------|-------|
| | | | Cone | Temp | Depth | Opening Width | Cu.Ft. | A | B | C | D | E | F | Amps | Watts | | |
| GMT-818 | 1 | 208 | 0 | 1800 | 18 | 18.00 | 2.6 | 23 | 22.5 | 2.5 | 8 | 15.5 | 18 | 26.7 | 5500 | 6-50 | 8700 |
| | | | | | | | | | | | | | | | | | |

OPTIONAL ACCESSORIES

| | |
|--------------|----------|
| ENVIROVENT 2 | Optional |
|--------------|----------|

CONTROLLER

Thermocouple: K
 Clock: 60 Mhz
 Voltage: 24 DC Relays
 Output: 12 Volts DC
 Fuse: 0.5 AMP

