




# PRODUCT SPECIFICATION: GMT-1214



DIMENSIONS

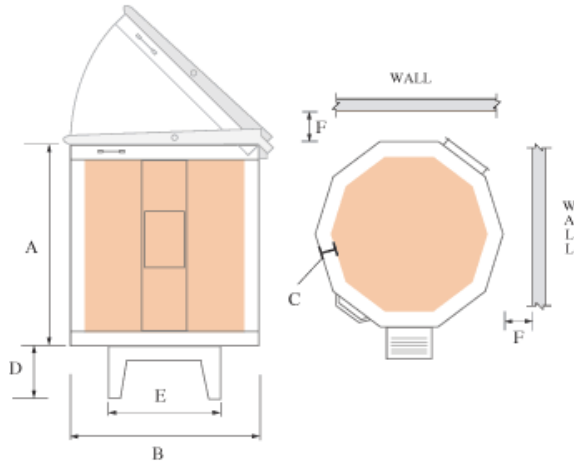

**SPECIFICATIONS & DIMENSIONS**

MODEL	Phase	Volts	Maximum		Chamber			O.D.Dimension						Power		Copper Wire Size	NEMA Recp. Conf.	BTU's
			Cone	Temp	Depth	Opening Width	Cu.Ft.	A	B	C	D	E	F	Amps	Watts			
GMT-1214	3	208		1800	13.5	28.00	5	33	34	3	8	12	18	29.4	10000	8	15-50	14100

**OPTIONAL ACCESORIES**

1214-3 ROLLING KILN STAND	Optional
- ADJUSTABLE	
ENVIROVENT 2	Optional

**CONTROLLER**

Thermocouple: K  
 Clock: 60 Mhz  
 Voltage: 24 DC Relays  
 Output: 12 Volts DC  
 Fuse: 0.5 AMP



Print this page